

## Revelation EP Series Specifications

(For specific EP26, EP33, EP34, EP36, EP44 and EP46 Series details, see page 2)

Revelation EP Series are designed to fit in standard 15/16" or 24mm grid systems or similar hard ceiling finished openings and can be joined together in a variety of configurations.

Drop Ceiling Applications:  
EcoPlus light box with attached Luminous SkyTile sits on, and is clipped to, Revelation Elevator

Hard Ceiling Applications:  
EcoPlus light box with attached Luminous SkyTile sits on Revelation Elevator

For drop ceiling and hard ceiling application details, see page 2.

### 1 Lighting (EcoPlus LED back lit light box):

Color temperature: 6500K  
Strict LED binning standards assure consistent & high quality illumination  
State of the art back lit technologies provide uniform illumination for the Luminous SkyTile graphic  
Housed in a white powder-coated, extruded (non-ferrous) aluminum frame  
Moisture and chemical resistant  
Each unit has a four knock-out junction box  
Compatible with MRI and other RF-free environments

### 2 Luminous SkyTile (lens):

Acrylic, Acrylite, or polycarbonate substrate  
Durable and easy to clean non-glare matte finish  
High resolution reproduction from proprietary digital image file  
Color-calibrated for daylight quality light source  
Fade resistant pigmented inks containing UV inhibitors

### 3 Revelation Elevator (frame):

Durable, moisture resistant and easy to clean  
Quick and easy installation  
Light weight powder-coated aluminum, white matte finish to match standard grid  
2.75" (7cm) vertical profile  
Compatible with standard 15/16" or 24mm grid systems or hard ceilings  
Precision machined corners, seamless architectural appearance

### UL, CSA, and CE compliant:

EP26, EP33, EP34, EP36, EP44, EP46 and EPCST Series when used with 24PS HLG Power System, UL/CSA Listed or CE Compliant power supply fully certified by Intertek Group plc

### Electrical:

24V DC

For amperages and watts of specific fixtures, see page 2

Sky Factory 24PS HLG Power System

Converts 100-240V AC (277V AC North America only) to 24V DC

Size and quantity per installation calculated by Sky Factory

Power system aluminum enclosure

Mounted on baseplate with junction box on input and output ends

See 24PS HLG Power System Technical Specifications sheet

Sky Factory provided HLG dimmable power supply (International Only)

Converts 100-240V AC (277V AC North America only) to 24V DC

Client provided UL/CSA Listed or CE Compliant power supply

Must convert V AC to 24V DC

### Items not provided:

AC wiring between fuse/breaker panel and 24V DC power system

DC wiring between 24V DC power system and EcoPlus light box

Dimmer wiring between 24V DC power system and switch/dimmer control box

RFI/EMI filters for MRI installations

See Revelation w/ EcoPlus Installation Instructions; and,

Revelation w/ EcoPlus Electrical Packet (24PS HLG),

Electrical Instructions (HLG) or Electrical Instructions (Fixture Only)

### Ceiling Clearance:

Fixture height from ceiling grid 8.5" (21.6cm)

Recommended minimum space above ceiling grid 10.88" (27.6cm)

(where access above the ceiling is available from the side, ex: typical grid ceiling)

Recommended minimum space above soffit 12.5" (31.8cm)

(where access above the ceiling is not available from the side, ex: typical hard ceiling)


Ceiling height of no less than 9' (2.74m) recommended

For help with ceiling constraints, please contact the Sky Factory

## Revelation EP Series

### Recessed Ceiling Mount


### Back Illuminated Sky Image Ceiling

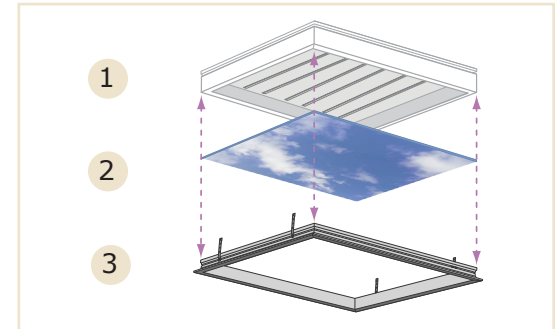

### Key Attributes:

15/16" (24mm) ceiling grid or hard ceiling applications  
6500 Kelvin – cool daylight  
Non-ferrous, RF-free construction  
MRI compatible

### Cross Section Details

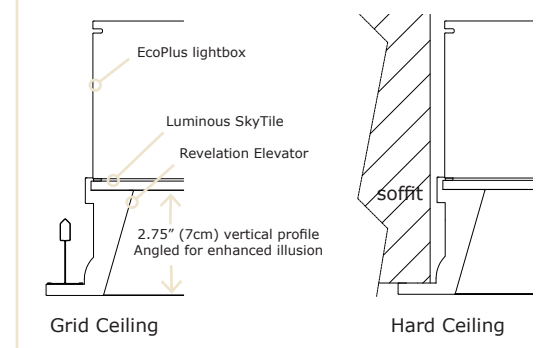

### Weight:

For installed weight of fully assembled Revelation EP Series fixture, see page 2.

### Configurations:

Revelation EP Series fixtures can be grouped together in a wide variety of configurations.

### Installation:

Elevators, tiles and light box easily installed into standard 15/16" or 24mm grid systems and can be recessed into a variety of hard ceilings.

### US Patent Information:

Our products, systems, and methods may be protected by one or more of the following US Patents: Pat. 9,164,011, Pat. 8,851,700, Pat. 7,959,316, and Pat. 7,481,550, as well as other patents pending.

Model	Amps [A]	Power [W]	Weight	Drop Ceiling Application
<b>EP26-RVN Series</b>	2.88	69.12		
EP26			44.8 lbs	Fits in standard 2' x 6' on center, 15/16" grid system
EP26m			19.8 kg	Fits in standard 60cm x 180cm on center, 25mm grid system
EP26g			21.1 kg	Fits in standard 62.5cm x 187.5cm on center, 25mm grid system
<b>EP33-RVN Series</b>	2.16	51.84		
EP33			33.7 lbs	Fits in standard 3' x 3' on center, 15/16" grid system
EPm			15 kg	Fits in standard 90cm x 90cm on center, 25mm grid system
EPg			15.9 kg	Fits in standard 93.75cm x 93.75cm on center, 25mm grid system
<b>EP34-RVN Series</b>	2.88	69.12		
EP34			42.5 lbs	Fits in standard 3' x 4' on center, 15/16" grid system
EPm			19.3 kg	Fits in standard 90cm x 120cm on center, 25mm grid system
EPg			20 kg	Fits in standard 93.75cm x 125cm on center, 25mm grid system
<b>EP36-RVN Series</b>	4.32	103.68		
EP36			60 lbs	Fits in standard 3' x 6' on center, 15/16" grid system
EPm			26.5 kg	Fits in standard 90cm x 180cm on center, 25mm grid system
EPg			28.3 kg	Fits in standard 93.75cm x 187.5cm on center, 25mm grid system
<b>EP44-RVN Series</b>	3.84	92.16		
EP44			53.4 lbs	Fits in standard 4' x 4' on center, 15/16" grid system
EPm			23.6 kg	Fits in standard 120cm x 120cm on center, 25mm grid system
EPg			25.2 kg	Fits in standard 125cm x 125cm on center, 25mm grid system
<b>EP46-RVN Series</b>	5.75	138		
EP46			74.6 lbs	Fits in standard 4' x 6' on center, 15/16" grid system
EPm			33.0 kg	Fits in standard 120cm x 180cm on center, 25mm grid system
EPg			35.2 kg	Fits in standard 125cm x 187.5cm on center, 25mm grid system
				<b>Hard Ceiling Application</b>
				EPXX-RVN Series fixtures fit in a variety of hard ceiling applications
				Contact Sky Factory for specific finished opening dimensions